

MultiG-Rank: Multiple graph regularized protein ranking

Jing-Yan Wang^{*1}

¹ Mathematical and Computer Sciences and Engineering Division, King Abdullah University of Science and Technology, Thuwal, 23955-6900, Saudi Arabia

Email: Jing-Yan Wang - jingyan.wang@kaust.edu.sa;

^{*}Corresponding author

Abstract

Background Protein ranking is a fundamental task in structural biology. Most protein ranking methods rely on the pairwise comparison of proteins while neglecting the global manifold structure of the protein database. Recently, graph regularized ranking is proposed by exploiting the global structure of the graph defined by these pairwise similarities. However, the existing graph regularized ranking methods are very sensitive to the choices of graph model and parameters, which remains a tough problem.

Results To solve this problem, we have developed Multiple Graph regularized Ranking algorithm - MultiG-Rank. Instead of using a single graph to regularize the ranking scores, we approximate the intrinsic manifold of protein distribution by combining multiple initial graphs for the regularization. The graph weights are learned with ranking scores jointly and automatically, by minimizing an object function alternately in an iterative algorithm. Experimental results on the ASTRAL SCOP protein database demonstrate that MultiG-Rank achieves the better ranking performance comparing to both other single graph regularized ranking methods and pairwise similarity base ranking methods.

Conclusion The problem of graph model and parameter selection in graph regularized protein ranking can be effectively solved by combining multiple graphs. This aspect of generalization introduces a new frontier in applying multiple graph to solving protein ranking applications.

Background

Ranking and retrieving proteins from a protein database which contain a substructure similar to a query protein is a critical task for analyzing of protein structure, function, and evolution in structural biology and bioinformatics [1, 2]. The similar proteins discovered by the ranking system may help the biologist to infer functional properties of the query from the returned proteins. For example, if a query protein whose function is unknown, but retrieves a large number of database proteins of enzymes, it is also likely to be an enzymes [3].

The output of the ranking procedure is a list of database proteins that are ranked according to their similarity measure to the query in the descending order. The choice of similarity measure largely decides the performance of a ranking system as argued by [4]. There are a large number of existing algorithms to computing the similarity as ranking scores:

Pairwise protein comparison compute the similarity between a pair of proteins by protein structure alignment or protein features comparison. *Protein structure alignment based methods* compare protein structures at a level of residues, sometime even atoms, to detect structural similarities with high sensitivity and accuracy. For example, Carpentier et al. proposed YAKUSA [5] which compares protein structures using a one-dimensional characterizations based on protein backbone internal angles, while Jung and Lee proposed SHEBA [6] for structural database scanning based one the environmental profiles. *Protein feature based methods* extract structure features and compute the similarity using a similarity or distance function. For example, Zhang et al. used the 32-D tableau feature vector in a comparison procedure called IR tableau [7], while Lee and Lee introduced a measure called WDAC (Weighted Domain Architecture Comparison) used in protein comparison context [7]. Both use cosine similarity for comparison purposes.

Graph based similarity learning Traditional protein comparison methods mentioned above focus on detecting pairwise sequence alignments while neglecting all other proteins in the database and their distributions. To tackle this problem, graph-based transductive similarity learning algorithm has been proposed [3, 4]. Instead of focusing on computing the similarity for a pair of proteins, this kind of methods take advantage of the graph formed by the existing proteins. By collectively propagating the similarity measures to the query protein and between the database proteins via graph transduction (GT), we can learn a better metric for ranking.

The key component of graph based ranking is the construction of graph as the estimation the intrinsic

manifold of the database. As argued by Cai et al. [8], there are many choices to define different graphs with different models and parameters. However, up to now, there are no explicit rules for choice of graph model and parameters in general. In [4], the graph parameters are determined by grid-search of different pairs of parameters. In [8], several graph models are considered for graph regularization, and exhaustive experiment are also carried for graph model and parameters selection. However, this kind of grid-search strategies selects parameters from discrete values in the parameter space, thus lack the ability to approximate the optimal solution. At the same time, the cross-validation [9, 10] can also be utilized for parameter selection, but it does not always scale up very well for many graph parameters, and sometimes might over fit the training and the validation set while not generalizing well on the query set.

In [11], Geng et al. proposed an ensemble manifold regularization (EMR) framework, which combines the automatic intrinsic manifold approximation and semi-supervised learning (SSL) [12, 13] of support vector machine (SVM) [14, 15]. Inspired by EMR, we try to solve the problem of graph model and parameter selection by fusing multiple graphs for ranking score learning of protein ranking. We first outline the graph regularized ranking score learning framework by optimizing the ranking scores learning with both relevant and graph constrains, and then generalize it to multiple graph case. By pre-computing a pool of some initial guesses of the graph Laplacian with different graph models and parameters, we try to combine them linearly to approximate the intrinsic manifold. The optimal graph model(s) with optimal parameters will be selected by assigning them with larger weights. Meanwhile, the learning of ranking scores are also learned by restricting to be smooth along the estimated graph. The graph weights and ranking scores are learned jointly, leading to a unified object function. The object function is optimized alternately and conditionally with respect to multiple graph weights and ranking scores in an iterative algorithm. We name our **Multiple Graph regularized Ranking** method as **MultiG-Rank**, which is composed of an off-line graph weights learning algorithm and an on-line ranking algorithm.

Method

Given a set of protein data represented by their Tableau 32-D feature vectors [7] $\mathcal{X} = \{x_1, x_2, \dots, x_N\}$, where $x_i \in \mathbb{R}^{32}$ is the Tableau feature vector of i -th protein, x_q is the query protein while others are database proteins. We define the ranking score vector as $\mathbf{f} = [f_1, f_2, \dots, f_N]^T \in \mathbb{R}^N$ in which f_i is the ranking score of x_i to the query. The protein ranking problem is to rank the proteins in $\mathcal{X}$ according to the ranking scores in a descending order, and return the several top ones as ranking results, so that the returned proteins can be as relevant to the query as possible. In our work, we define two proteins *relevant* if they belong to

the same SCOP fold type [16], and *irrelevant* otherwise. We denote the SCOP fold type label of proteins in $\mathcal{X}$ as $\mathcal{L} = \{l_1, l_2, \dots, l_N\}$, where l_i is the label of i -th protein. The optimal ranking scores of relevant proteins $\{x_i\}, l_i = l_q$ should be larger than the irrelevant ones $\{x_i\}, l_i \neq l_q$, so that the relevant proteins will be returned to the user.

Graph regularized protein ranking

The protein ranking problem is to learn a optimal ranking score vector $\mathbf{f}$. We apply two constraints on $\mathbf{f}$ to learn the optimal ranking scores:

Relevance constraint f should be consistent with protein relevant to the query provided by user, because the query protein reflects user’s search intention. We also define the relevance vector of protein as $\mathbf{y} = [y_1, y_2, \dots, y_N]^\top \in \{1, 0\}^N$ where $y_i = 1$, if x_i is relevant to query and $y_i = 0$, otherwise. Since the type label l_q of a query protein x_q is usually unknown, we only know that the query is relevant to itself while have no prior knowledge whether others are relevant to query or not, so we can only set $y_q = 1$ for sure and $y_i, i \neq q$ unknown.

To assign different weights to different proteins in $\mathcal{X}$, we define a diagonal matrix U as $U_{ii} = 1$ if y_i is known, and $U_{ii} = 0$ otherwise. To impose the relevant constraint to the learning of f , we propose to minimize the following objective function:

$$\begin{aligned} \min_{\mathbf{f}} O^r(\mathbf{f}) &= \sum_{i=1}^N (f_i - y_i)^2 U_{ii} \\ &= (\mathbf{f} - \mathbf{y})^\top U (\mathbf{f} - \mathbf{y}) \end{aligned} \quad (1)$$

Graph constraint f should also be consistent with the local distribution of protein database. We embed the local distribution into a K nearest neighbor graph $\mathcal{G} = \{\mathcal{V}, \mathcal{E}, W\}$. For each protein x_i , its K nearest neighbors excluding itself is denoted by $\mathcal{N}_i$. The node set $\mathcal{V}$ corresponds to N proteins in $\mathcal{X}$, while $\mathcal{E}$ is the edge set, and $(i, j) \in \mathcal{E}$ if $x_j \in \mathcal{N}_i$ or $x_i \in \mathcal{N}_j$. The weight of a edge (i, j) is denoted as W_{ij} which can be computed using different graph definitions and parameters as in the next section. The edge weights are further organized in a weight matrix $W = [W_{ij}] \in \mathbb{R}^{N \times N}$, where W_{ij} is the weight of edge (i, j) . We expect that if two proteins x_i and x_j are close (i.e., W_{ij} is big), f_i and f_j are also close to each other. To impose the graph constraint to the learning of f , we propose to minimize

the following objective function:

$$\begin{aligned}
\min_{\mathbf{f}} O^g(f) &= \frac{1}{2} \sum_{i,j=1}^N (f_i - f_j)^2 W_{ij} \\
&= \mathbf{f}^\top D \mathbf{f} - \mathbf{f}^\top W \mathbf{f} \\
&= \mathbf{f}^\top L \mathbf{f}
\end{aligned} \tag{2}$$

where D is a diagonal matrix whose entries are $D_{ii} = \sum_{j=1}^N W_{ij}$ and $L = D - W$ is the graph Laplacian matrix.

By combining the two constraints, the learning of $\mathbf{f}$ is based on the minimization of the following objective function:

$$\begin{aligned}
\min_{\mathbf{f}} O(\mathbf{f}) &= O^r(\mathbf{f}) + \alpha O^g(\mathbf{f}) \\
&= (\mathbf{f} - \mathbf{y})^\top U (\mathbf{f} - \mathbf{y}) + \alpha \mathbf{f}^\top L \mathbf{f}
\end{aligned} \tag{3}$$

where α is a trade-off parameter. The solution is easily obtained by setting the derivative of $O(\mathbf{f})$ with respect to $\mathbf{f}$ to zero as $\mathbf{f} = (U + \alpha L)^{-1} U \mathbf{y}$. In this way, we employ the information from both the query protein provided by the user and relationship of all the proteins in $\mathcal{X}$ to rank the proteins in $\mathcal{X}$. The query information is embedded in y and U , while the protein relationship information is embedded in L . The final ranking results are obtained by balancing the two sources of information. We call this method as **Graph regularized Ranking** (G-Rank) in this paper.

Multiple graph learning and ranking: MultiG-Rank

In this section, we propose the multiple graph learning to directly learn a self-adaptive graph for ranking regularization, in which the graph is assumed to be a linear combination of multiple predefined graph (referred to as base graphs). The graph weights are learned in a supervised way considering the SCOP fold types of the database proteins.

Multiple graph regularization

The key component of graph regularization is the construction of graph. There are many choices to find the neighbors $\mathcal{N}_i$ of x_i and to define the weight matrix W on the graph as declared by [8]. We list several of them as follows:

- **Heat kernel weighted graph:** $\mathcal{N}_i$ of x_i is found by comparing squared Euclidean distance as

$$||x_i - x_j||^2 = x_i^\top x_i - 2x_i^\top x_j + x_j^\top x_j \tag{4}$$

and the weighting is computed using a Heat kernel as

$$W_{ij} = \begin{cases} e^{-\frac{||x_i - x_j||^2}{\sigma}}, & \text{if } (i, j) \in \mathcal{E} \\ 0, & \text{else} \end{cases} \quad (5)$$

where σ is the bandwidth of the kernel.

- **Dot-product weighted graph:** $\mathcal{N}_i$ of x_i is found by comparing squared Euclidean distance and the weighting is computed as dot-product

$$W_{ij} = \begin{cases} x_i^\top x_j, & \text{if } (i, j) \in \mathcal{E} \\ 0, & \text{else} \end{cases} \quad (6)$$

- **Cosine similarity weighted graph:** $\mathcal{N}_i$ of x_i is found by comparing cosine similarity as

$$C(x_i, x_j) = \frac{x_i^\top x_j}{||x_i|| ||x_j||} \quad (7)$$

and the weighting is also assigned as cosine similarity

$$W_{ij} = \begin{cases} C(x_i, x_j), & \text{if } (i, j) \in \mathcal{E} \\ 0, & \text{else} \end{cases} \quad (8)$$

- **Jaccard index weighted graph:** $\mathcal{N}_i$ of x_i is found by comparing the Jaccard index [17]

$$J(x_i, x_j) = \frac{|x_i \cap x_j|}{|x_i \cup x_j|} \quad (9)$$

and the weighting is also assigned as

$$W_{ij} = \begin{cases} J(x_i, x_j), & \text{if } (i, j) \in \mathcal{E} \\ 0, & \text{else} \end{cases} \quad (10)$$

- **Tanimoto coefficient weighted graph:** $\mathcal{N}_i$ of x_i is found by comparing the Tanimoto coefficient

$$T(x_i, x_j) = \frac{x_i^\top x_j}{||x_i||^2 + ||x_j||^2 - x_i^\top x_j} \quad (11)$$

and the weighting is also assigned as

$$W_{ij} = \begin{cases} T(x_i, x_j), & \text{if } (i, j) \in \mathcal{E} \\ 0, & \text{else} \end{cases} \quad (12)$$

Given so many choices of graphs, the most suitable graph with its parameters for the protein ranking task is often unknown in advance, thus an exhaustive search on a predefined pool of graphs will be necessary. However, when the size of the pool becomes large, the exhaustive search will be quite time-consuming and

sometimes not possible. Hence, learning an appropriate graph efficiently to make the performance of the employed graph-based ranking method robust or even improved is crucial for graph regularized ranking. To tackle the aforementioned problems, we propose an multiple graph regularized ranking framework, by providing a series of initial guesses of the graph Laplacian and combining them to approximate the intrinsic manifold in a conditionally optimal way, inspired by [11].

Given a set of M graph candidates $\{\mathcal{G}_1, \dots, \mathcal{G}_M\}$, we denote their corresponding candidate graph Laplacians as $\mathcal{T} = \{L_1, \dots, L_M\}$. By assuming that the optimal graph Laplacian lies in the convex hull of the pre-given graph Laplacian candidates, we constraint the search space of possible graph Laplacians as linear combination of L_m in $\mathcal{T}$ as

$$L = \sum_{m=1}^M \mu_m L_m \quad (13)$$

where μ_m is the weight of m -th graph. To avoid the negative contribution, we further constraint $\sum_{m=1}^M \mu_m = 1$, $\mu_m \geq 0$.

To utilize the information from data distribution approximated by the new composite graph Laplacian L in (13) for protein ranking, we introduce a new multi graph regularization term. Substituting (13) into (2), we have the augmented objective function term in an enlarged parameter space

$$\begin{aligned} \min_{\mathbf{f}, \mu} O^{multig}(\mathbf{f}, \mu) &= \sum_{m=1}^M \mu_m (\mathbf{f}^\top L_m \mathbf{f}) \\ s.t. \quad \sum_{m=1}^M \mu_m &= 1, \mu_m \geq 0. \end{aligned} \quad (14)$$

where $\mu = [\mu_1, \dots, \mu_M]^\top$ is the graph weight vector.

Off-line supervised multiple graph learning

In the on-line querying procedure, the relevance of query x_q to database proteins is unknown, thus the optimal graph weights μ cannot be learned in a supervised way. However, all the SCOP type labels of protein database are known, making supervised learning of μ in a off-line way possible. We treat each database protein $x_q \in \mathcal{D}$, $q = 1, \dots, N$ as a query in the off-line learning, and all the items of its relevant vector $\mathbf{y}_q = [y_{1q}, \dots, y_{Nq}]^\top$ is known since all the labels are known for all database proteins, as

$$\mathbf{y}_{iq} = \begin{cases} 1 & , if \ l_i = l_q \\ 0 & , else \end{cases} \quad (15)$$

Therefore, we set $U = I^{N \times N}$ as a $N \times N$ identity matrix. The ranking score vector of q -th database protein is also defined as $\mathbf{f}_q = [y_{1q}, \dots, y_{Nq}]^\top$. Substituting $\mathbf{f}_q$, $\mathbf{y}_q$ and U to (1) and (14) and combining them, we

have the optimization problem for q -th database protein as follows:

$$\begin{aligned} \min_{\mathbf{f}_q, \mu} O(\mathbf{f}_q, \mu) &= (\mathbf{f}_q - \mathbf{y}_q)^\top (\mathbf{f}_q - \mathbf{y}_q) + \alpha \sum_{m=1}^M \mu_m (\mathbf{f}_q^\top L_m \mathbf{f}_q) + \beta \|\mu\|^2 \\ \text{s.t. } \sum_{m=1}^M \mu_m &= 1, \mu_m \geq 0. \end{aligned} \quad (16)$$

To avoid the parameter μ overfitting to one single graph, we also introduce the l_2 norm regularization term $\|\mu\|^2$ to the object function. We must notice the difference between f_q and y_q . In fact the $f_q \in \{1, 0\}^N$ plays the role of given ground truth in the supervised learning procedure, while $y_q \in \mathbb{R}^N$ is the variable to be solved. f_q is the ideal solution of y_q but we cannot achieve it after the learning possibly. In (16), we introduce the first term to make y_q as similar to f_q as possible during the learning procedure.

Object function: Using all proteins in database $q = 1, \dots, N$ as queries to learn μ , we obtain the final object function of supervised multiple graph weighting and protein ranking problem:

$$\begin{aligned} \min_{F, \mu} O(F, \mu) &= \sum_{q=1}^N \left[(\mathbf{f}_q - \mathbf{y}_q)^\top (\mathbf{f}_q - \mathbf{y}_q) + \alpha \sum_{m=1}^M \mu_m (\mathbf{f}_q^\top L_m \mathbf{f}_q) \right] + \beta \|\mu\|^2 \\ &= \text{Tr} [(F - Y)^\top (F - Y)] + \alpha \sum_{m=1}^M \mu_m \text{Tr}(F^\top L_m F) + \beta \|\mu\|^2 \\ \text{s.t. } \sum_{m=1}^M \mu_m &= 1, \mu_m \geq 0. \end{aligned} \quad (17)$$

where $F = [\mathbf{f}_1, \dots, \mathbf{f}_N]$ is the ranking score matrix with its q -th column as the ranking score vector of q -th protein, and $Y = [\mathbf{y}_1, \dots, \mathbf{y}_N]$ is the relevance matrix with its q -th column as the relevance vector of q -th protein.

Optimization: Since direct optimization to (17) is difficult, we instead adopt an iterative, two-step strategy to alternately optimize F and μ . At each iteration, one of F and μ is optimized while the other is fixed, and then the roles of F and μ are switched. Iterations are repeated until a maximum number of iterations is reached.

- *On optimizing F :* With the fixed graph weight μ , the analytic solution for problem (17) can then be easily obtained by setting the derivative of $O(F, \mu)$ with respect to F to zero. That is,

$$\begin{aligned} \frac{\partial O(F, \mu)}{\partial F} &= 2(F - Y) + 2\alpha \sum_{m=1}^M \mu_m (L_m F) = 0 \\ F &= (I + \alpha \sum_{m=1}^M \mu_m L_m)^{-1} Y \end{aligned} \quad (18)$$

- *On optimizing μ* : By fixing F and removing items irrelevant to μ from (17), the optimization problem (17) is reduced to

$$\begin{aligned}
\min_{\mu} \quad & \alpha \sum_{m=1}^M \mu_m \text{Tr}(F^\top L_m F) + \beta \|\mu\|^2 \\
= \quad & \alpha \sum_{m=1}^M \mu_m e_m + \beta \sum_{m=1}^M \mu^2 \\
= \quad & \alpha e^\top \mu + \beta \mu^\top \mu \\
\text{s.t.} \quad & \sum_{m=1}^M \mu_m = 1, \mu_m \geq 0.
\end{aligned} \tag{19}$$

where $e_m = \text{Tr}(F^\top L_m F)$ and $e = [e_1, \dots, e_M]^\top$. The optimization of (19) with respect to the graph weight μ can be solved as a standard quadratic programming (QP) problem [1].

Off-line algorithm: We summarize the off-line μ learning algorithm in Algorithm 1.

Algorithm 1 MultiG-Rank: off-line graph weights learning algorithm.

Require: Candidate graph Laplacians set $\mathcal{T}$;

Require: SCOP type label set of database proteins $\mathcal{L}$;

Require: Maximum iteration number T ;

Construct the relevance matrix $Y = [y_{iq}]^{N \times N}$ where y_{iq} if $l_i = l_q$, 0 otherwise;

Initialize the graph weights as $\mu_m^0 = \frac{1}{M}$, $m = 1, \dots, M$;

for $t = 1, \dots, T$ **do**

 Update the ranking score matrix F^t according to previous μ_m^{t-1} by (18);

 Update the graph weight μ^t according to updated F^t by (19);

end for

Output graph weight $\mu = \mu^t$.

On-line ranking regularized by multiple graphs

Given a new discovered protein submitted by a user as query x_0 , its SCOP type label l_0 is unknown and it is not in the database $\mathcal{D} = \{x_1, \dots, x_N\}$. To compute the ranking scores of $x_i \in \mathcal{D}$ to query x_0 , we extend the size of database to $N + 1$ by adding x_0 into database and solve the ranking score vector for x_0 which is defined as $\mathbf{f} = [f_0, \dots, f_N] \in \mathbb{R}^{N+1}$ by (3). The parameters in (3) are constructed as follows:

- **Laplacian matrix L :** We first compute the m graph weight matrices $\{W_m\}_{m=1}^M \in \mathbb{R}^{(N+1) \times (N+1)}$ with their corresponding Laplacian matrices $\{L_m\}_{m=1}^M \in \mathbb{R}^{(N+1) \times (N+1)}$ for the extended database $\{x_0, x_1, \dots, x_N\}$. Then with the graph weight μ learned by Algorithm 1, the new Laplacian matrix L can be computed as (13).

On-line graph weight computation: When a new query x_0 comes in, we calculate its K nearest neighbors in the database $\mathcal{D}$ and the corresponding weights W_{0j} and $W_{j0}, j = 1, \dots, N$. Suppose that the adding of this new query to the database does not affect the graph in the database space, so the neighbors and weights $W_{ij}, i, j = 1, \dots, N$ for the database proteins are fixed and can be pre-computed off-line. In this way, we only need to compute N edge weights for each graph instead of $(N + 1) \times (N + 1)$.

- **Relevance vector y :** The relevance vector for x_0 is defined as $\mathbf{y} = [y_0, \dots, y_N]^\top \in \{1, 0\}^{N+1}$ with only $y_0 = 1$ known while other $y_i, i = 1, \dots, N$ unknown.
- **Matrix U :** In this situation, U is a $(N + 1) \times (N + 1)$ diagonal matrix with $U_{00} = 1$ and $U_{ii} = 0, i = 1, \dots, N$.

Then the ranking score vector f can be solved as

$$\mathbf{f} = (U + \alpha L)^{-1} U \mathbf{y} \quad (20)$$

We summarize the on-line ranking algorithm as in Algorithm 2.

Algorithm 2 MultiG-Rank: on-line ranking algorithm.

Require: Protein database $\mathcal{D} = \{x_1, \dots, x_N\}$;

Require: Query protein x_0 ;

Require: Graph weight μ ;

Extend the database to $(N + 1)$ size by adding x_0 and compute M graph Laplacians of the extended database;

Obtain multiple graph Laplacian L by linear combination of M graph Laplacians with weight μ as (13);

Construct the relevance vector $\mathbf{y} \in \mathbb{R}^{(N+1)}$ where $y_0 = 1$ and diagonal matrix $U \in \mathbb{R}^{(N+1) \times (N+1)}$ with $U_{ii} = 1$ if $i = 0$ and 0 otherwise;

Solve the ranking vector $\mathbf{f}$ for x_0 as in (20);

Ranking proteins in $\mathcal{D}$ according to ranking scores $\mathbf{f}$ in descending order.

Experiments

Protein database and query set

We use the SCOP 1.75A database [18] to construct our database and query set. In SCOP 1.75A database, there are 49,219 protein PDB entries and 135,643 Domains, belonging to 7 classes, and 1,194 SCOP fold types.

Protein database

Our database is selected from the *ASTRAL SCOP 1.75A* set [18]. The *ASTRAL* is a compendium providing databases and tools for analyzing protein structures and their sequences and it is partially derived from, and

augments the *SCOP* (Structural Classification of Proteins) database. Its current version is *1.75A*, released at March 15, 2012 [18]. A subset of SCOP 1.75A database — the ASTRAL SCOP 1.75A genetic domain sequence subsets (ASTRAL SCOP 1.75A 40%) [18] is used as our database $\mathcal{D}$. This database is selected from SCOP 1.75A database so that the selected domains are with less than 40% identity to each other. There are totally 11,212 protein domains in the ASTRAL SCOP 1.75A 40% database belonging to 1,196 SCOP fold types, which are available on-line at <http://scop.berkeley.edu>. The distribution of protein numbers of different fold types are shown in Fig. 1. We must notice that many previous works in this field evaluated the ranking performance on the old version of ASTRAL SCOP dataset (ASTRAL SCOP 1.73 %95) released in 2008 [7]. But since new version has been released in 2012 (ASTRAL SCOP 1.75A %40), we choose to use the new version in our experiment.

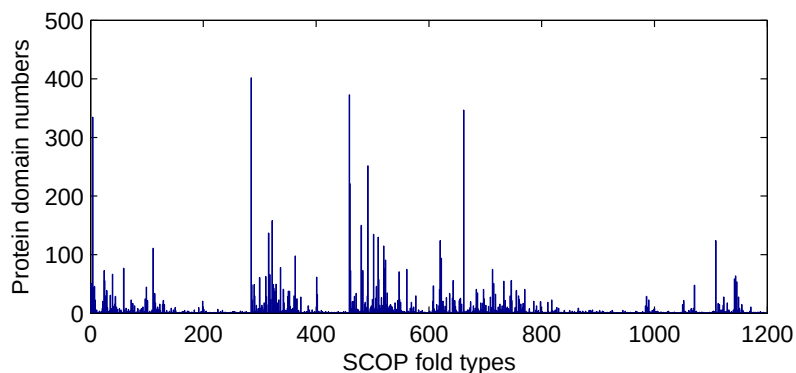


Figure 1: Distribution of protein numbers of different fold types in ASTRAL SCOP 1.75A 40% database.

Query set

We also select 540 protein domains from SCOP 1.75A database to construct a query set. Each query protein domains has at least one protein domains belonging to the same SCOP fold type from the ASTRAL SCOP 1.75A 40% database, so that for each each query, there will be at least one "positive" sample in the database. We call our database and query set as *540 query* dataset in our paper since it contains 540 protein domains from SCOP 1.75A database.

Evaluation metrics

We run a ranking procedure using a query and returns a list of all database proteins along with their ranking scores to the query. We adopt the same evaluation metric framework as [7], and use the receiver operating

characteristic (ROC) curve, the area under this ROC curve (AUC) and the recall-precision curve to evaluate the ranking accuracy. Given a query protein x_q belonging to the SCOP fold l_q , a list of proteins will be returned from the database by the on-line MultiG-Rank algorithm or other ranking methods. For a database protein x_0 among the returned list, if its fold label l_r is the same as that of x_0 , i.e. $l_r = l_0$ it will be identified as a true positive (TP), else it will be identified as a false positive (FP). For a database protein $x_{r'}$ not among the returned list, if its fold label $l_{r'} \neq l_0$, it will be identified as a true negative (TN), else a false negative (FN). We then can then compute the true positive rate (TPR), false positive rate (FPR), recall and precision basad on the above statistics as follows:

$$\begin{aligned} TPR &= \frac{TP}{TP + FN}, & FPR &= \frac{FP}{FP + TN} \\ recall &= \frac{TP}{TP + FN}, & precision &= \frac{TP}{TP + FP} \end{aligned} \quad (21)$$

By varying the length of the returned list, we will have different TPR , FRP , recall and precision values.

ROC curve Using FPR as the abscissa and TPR as the ordinate, we can plot the ROC curve. For a high-performance ranking system, the ROC curve should be close to the top-left corner.

Recall-Precision curve Using recall as the abscissa and precision as the ordinate, Recall-Precision curve can be plotted. For a high-performance ranking system, this curve should be close to the top-right corner of the plot.

AUC The AUC is also computed as a single-figure measurement for the quality of an ROC curve. We average AUC over all the queries to evaluate the performances of different ranking methods.

Results

In this section we first compare our MultiG-Rank against several popular graph based ranking score learning methods for ranking of protein domains. represented by Tableau Then, we also evaluate the ranking performance of MultiG-Ranking with other protein ranking methods using different protein comparison strategies.

Comparison against other graph based ranking methods

We compare our MultiG-Rank to two graph based ranking methods — G-Rank and GT [4]. The Cosine similarity is used as a baseline pairwise similarity in this experiment, marked as “Pairwise Rank” in the figure. The evaluations are conducted with 540 queries of the *540 query* set. The average ranking performance is computed over these 540 query running.

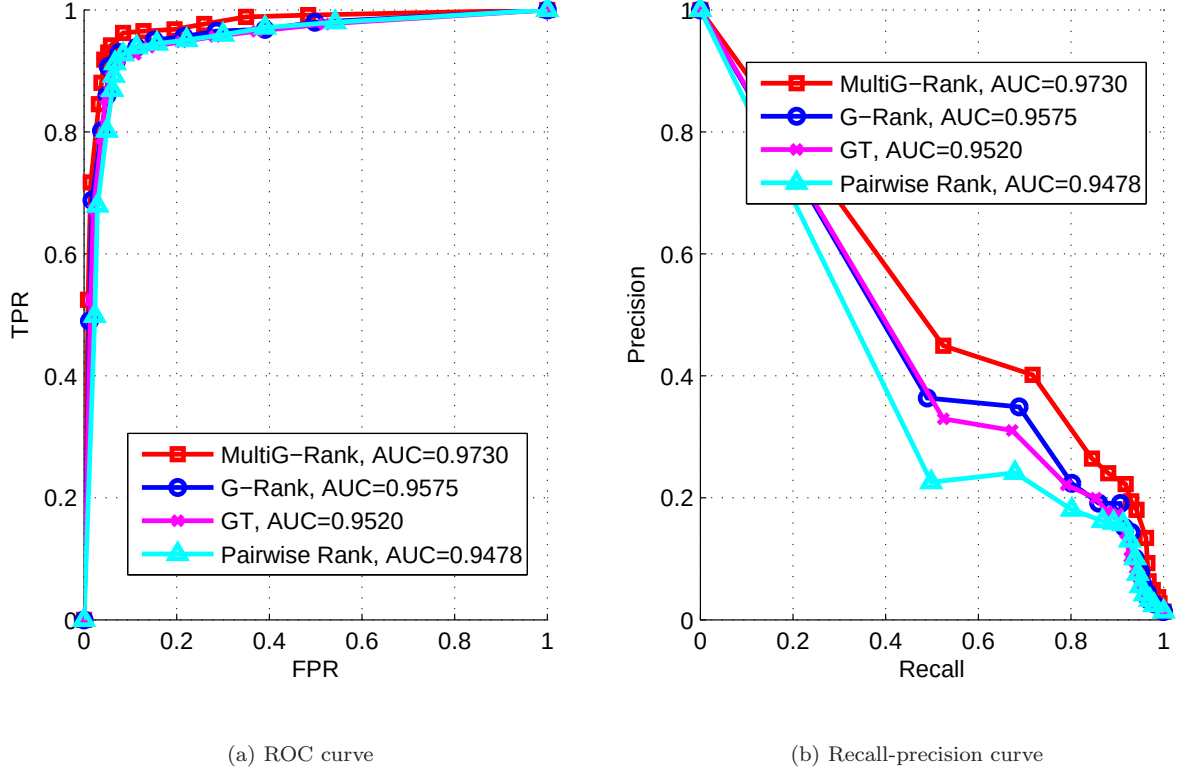


Figure 2: ROC curve and Recall-precision curve of different graph-based ranking methods

Fig. 2 shows the recall-precision curve and ROC curve by using different graph ranking methods. Each curve in the figures represents a graph based ranking score learning algorithm. As can be seen, our MultiG-Rank algorithm significantly outperforms the other graph based ranking algorithms. As shown in Fig. 2 (b), the precision difference gets larger as the recall value increases and then tend to converge to zero. The G-Rank algorithm outperforms GT in most cases. However, both G-Rank and GT are much better than pairwise ranking neglecting the global distribution of protein database.

Table 1: AUC results off different graph-based ranking methods.

Method	AUC
MultiG-Rank	0.9730
G-Rank	0.9575
GT	0.9520
Pairwise-Rank	0.9478

Table 1 tabulates the AUC results of different graph-based methods on the 540 query set. The best AUC

result of each method was recorded for a fair comparison. As shown in this table, the proposed MultiG-Rank consistently outperforms the 3 compared methods on our database. It achieved the gain in accuracy of 0.0155, 0.0210 and 0.0252 on 540 query set compared with the other best compared method, respectively. This way, the ranking precision can be significantly improved by using our algorithm. The two single graph based ranking methods — GT and G-Rank algorithms achieve similar AUC values (about 0.95), while they are outperformed by MultiG-Rank significantly (about 0.02).

We have made three observations from the results listed in Table 1:

1. G-Rank and GT obtain similar performance on database, indicating that there is no significant difference on the performance of either graph *transduction* based or graph *regularization* based for unsupervised learning of the ranking score using a single graph.
2. Pairwise ranking obtains the worst performance even though it use a carefully selected similarity function as reported in [7]. The reason is that the similarity computed by pairwise ranking focus only on detecting statistically significant pairwise difference while missing more subtle sequence similarity. Hence, the variance among different fold types cannot be accurately estimated in this scenario by neglecting the global distribution and only considering the protein pairs compared. Another possible reason is that pairwise ranking usually obtains better ranking performance when the number of proteins of the database is small. However, when the number of protein is large as in our database, the ranking performance of pairwise ranking is poor.
3. MultiG-Rank obtains the best ranking performance, which implies that both discriminant and geometrical information of protein database are important for accurate ranking. The geometrical information is estimated by multiple graphs. The discriminant information is included when graph weights are learned with help of SCOP fold type labels in our algorithm.

Comparison with other protein ranking methods

In this experiment, we compare our MultiG-Rank against several popular protein ranking methods — IR Tableau [7], QP tableau [1], YAKUSA [5], and SHEBA [6]. For the purpose of comparison, we first consider different methods for protein-protein comparison to compute the similarity or dissimilarity. The ordering technique is devised to detect hits by taking the similarities between data pairs as input. For our MultiG-Rank, the ranking score plays the role of protein-protein similarity. The AUC values are reported in Table

Table 2: AUC results for different protein ranking methods.

Method	AUC
MultiG-Rank	0.9730
IR Tableau	0.9478
YAKUSA	0.9537
SHEBA	0.9421
QP tableau	0.9364

2.

It can be observed from Table 2 that with the advantage of exploring data characteristics from various graphs, MultiG-Rank can achieve significant improvements in the ranking outcomes: AUC is increased from 0.9478 to 0.9730 using the same Tableau feature as IR Tableau. It also outperforms QP Tableau, SHEBA , and YAKUSA, and improves the AUC from 0.9364, 0.9421 and 0.9537 to 0.9478. Furthermore, owing to its better use of effective protein descriptors, IR Tableau also outperforms QP Tableau.

To evaluate the effect of using protein descriptors for ranking instead of direct protein structure comparison, we compare IR Tableau with YAKUSA and SHEBA. The main difference among them is that IR Tableau considers both protein feature extraction and comparison procedures while YAKUSA and SHEBA only compare a pair of proteins directly. The quantitative results in Table 2 show that IR Tableau cannot outperform YAKUSA by making use of the additional information from the protein descriptor. This is a strong evidence that the ranking performance improvement is mainly archived by the graph regularization, but not the power of protein descriptor.

Conclusion

The proposed MultiG-Rank introduces a new paradigm to fortify a broad scope of existing graph based ranking techniques. Its main advantage lies in the ability of learning a unified space of ranking scores for protein database in multiple graph representations. Such a flexibility is important in tackling complicated protein ranking problems, and allows one to explore more prior knowledge for effectively analyzing a given protein database, including choosing a proper set of graphs to better characterize the manifold of database, and adopting a multiple graph-based ranking method to appropriately model the relationship among the proteins. Throughout this work, MultiG-Rank has been comprehensively evaluated on a carefully selected subset of ASTRAL SCOP 1.75 A protein database. The promising experimental results further consolidate the usefulness of our ranking score learning approach. Moreover, MultiG-Rank can also be used to other bioinformatics [19–24], medical imaging [25–28], biometrics [29–34] and computer vision [35–38].

Competing interests

The authors declare no competing interests.

Author's contributions

JW invented, designed and wrote the algorithm, collected the data, performed the experiments and drafted the manuscript.

References

1. Stivala A, Wirth A, Stuckey PJ: **Tableau-based protein substructure search using quadratic programming.** *BMC Bioinformatics* 2009, **10**:153.
2. Stivala AD, Stuckey PJ, Wirth AI: **Fast and accurate protein substructure searching with simulated annealing and GPUs.** *BMC Bioinformatics* 2010, **11**.
3. Weston J, Kuang R, Leslie C, Noble W: **Protein ranking by semi-supervised network propagation.** *BMC Bioinformatics* 2006, **7**(1).
4. Bai X, Yang X, Latecki LJ, Liu W, Tu Z: **Learning Context-Sensitive Shape Similarity by Graph Transduction.** *IEEE Transactions on Pattern Analysis and Machine Intelligence* 2010, **32**(5):861–874.
5. Carpentier M, Brouillet S, Pothier J: **YAKUSA: A fast structural database scanning method.** *Proteins-Structure Function and Bioinformatics* 2005, **61**(1):137–151.
6. Jung J, Lee B: **Protein structure alignment using environmental profiles.** *Protein Engineering* 2000, **13**(8):535–543.
7. Zhang L, Bailey J, Konagurthu AS, Ramamohanarao K: **A fast indexing approach for protein structure comparison.** *BMC Bioinformatics* 2010, **11**(1).
8. Cai D, He X, Han J, Huang TS: **Graph Regularized Nonnegative Matrix Factorization for Data Representation.** *IEEE Transactions on Pattern Analysis and Machine Intelligence* 2011, **33**(8):1548–1560.
9. Varma S, Simon R: **Bias in error estimation when using cross-validation for model selection.** *BMC Bioinformatics* 2006, **7**.
10. Nagel K, Jimeno-Yepes A, Rebholz-Schuhmann D: **Annotation of protein residues based on a literature analysis: cross-validation against UniProtKb.** *BMC Bioinformatics* 2009, **10**.
11. Geng B, Tao D, Xu C, Yang L, Hua X: **Ensemble Manifold Regularization.** *IEEE Transactions on Pattern Analysis and Machine Intelligence* 2012, **PP**(99):1.
12. You ZH, Yin Z, Han K, Huang DS, Zhou X: **A semi-supervised learning approach to predict synthetic genetic interactions by combining functional and topological properties of functional gene network.** *BMC Bioinformatics* 2010, **11**.
13. Min Song, Hwanjo Yu, Wook-Shin Han: **Combining active learning and semi-supervised learning techniques to extract protein interaction sentences.** *BMC Bioinformatics* 2011, **S4** (11 pp.).
14. Kandaswamy KK, Pugalenth G, Hazrati MK, Kalies KU, Martinetz T: **BLProt: prediction of bioluminescent proteins based on support vector machine and relief feature selection.** *BMC Bioinformatics* 2011, **12**.
15. Tung CW, Ziehm M, Kaemper A, Kohlbacher O, Ho SY: **POPISK: T-cell reactivity prediction using support vector machines and string kernels.** *BMC Bioinformatics* 2011, **12**.
16. Jian-Yu Shi, Yan-Ning Zhang: **Fast SCOP classification of structural class and fold using secondary structure mining in distance matrix.** In *Pattern Recognition in Bioinformatics. Proceedings 4th IAPR International Conference, PRIB 2009* 2009:344–53.
17. Albatineh AN, Niewiadomska-Bugaj M: **Correcting Jaccard and other similarity indices for chance agreement in cluster analysis.** *Advances in Data Analysis and Classification* 2011, **5**(3):179–200.

18. Chandonia J, Hon G, Walker N, Lo Conte L, Koehl P, Levitt M, Brenner S: **The ASTRAL Compendium in 2004.** *Nucleic Acids Research* 2004, **32**(SI):D189–D192.
19. Wang J, Li Y: **SEQUENTIAL LINEAR NEIGHBORHOOD PROPAGATION FOR SEMI-SUPERVISED PROTEIN FUNCTION PREDICTION.** *JOURNAL OF BIOINFORMATICS AND COMPUTATIONAL BIOLOGY* 2011, **9**(6):663–679.
20. Jingyan Wang, Yongping Li, Ying Zhang, Ning Tang, Chao Wang: **Class Conditional Distance Metric for 3D Protein Structure Classification.** In *2011 5th International Conference on Bioinformatics and Biomedical Engineering*, Eng. Medicine Biol. Soc. 2011:4 pp. [2011 5th International Conference on Bioinformatics and Biomedical Engineering, 10-12 May 2011, Wuhan, China].
21. Jingyan Wang, Yongping Li, Ying Zhang, Jianhua He: **Semi-supervised Protein Function Prediction via Sequential Linear Neighborhood Propagation.** In *Bio-Inspired Computing and Applications. 7th International Conference on Intelligent Computing, ICIC 2011. Revised Selected Papers.* Edited by De-Shuang Huang, Yong Gan, Premaratne P, Kyungsook Han 2011:435–41. [Bio-Inspired Computing and Applications. 7th International Conference on Intelligent Computing, ICIC 2011, 11-14 Aug. 2011, Zhengzhou, China].
22. Wang J, Gao X, Wang Q, Li Y: **ProDis-ContSHC: learning protein dissimilarity measures and hierarchical context coherently for protein-protein comparison in protein database retrieval.** *BMC BIOINFORMATICS* 2012, **13**(7). [International Conference on Intelligent Computing (ICIC), Zhengzhou, PEOPLES R CHINA, AUG 11-14, 2011].
23. Wang J, Li Y, Wang Q, You X, Man J, Wang C, Gao X: **ProClusEnsem: Predicting membrane protein types by fusing different modes of pseudo amino acid composition.** *COMPUTERS IN BIOLOGY AND MEDICINE* 2012, **42**(5):564–574.
24. Pei H, Li J, Lv M, Wang J, Gao J, Lu J, Li Y, Huang Q, Hu J, Fan C: **A graphene-based sensor array for high-precision and adaptive target identification with ensemble aptamers.** *Journal of the American Chemical Society* 2012.
25. Jingyan Wang, Yongping Li, Ying Zhang, Honglan Xie, Chao Wang: **Boosted learning of visual word weighting factors for bag-of-features based medical image retrieval.** In *Proceedings of the Sixth International Conference on Image and Graphics (ICIG 2011).* Edited by Nenghai Yu, Yujin Zhang, Nat. Natural Sci. Found. China 2011:1035–40. [2011 Sixth International Conference on Image and Graphics (ICIG 2011), 12-15 Aug. 2011, Hefei, Anhui, China].
26. Jingyan Wang, Yongping Li, Ying Zhang, Honglan Xie, Chao Wang: **Bag-of-Features Based Classification of Breast Parenchymal Tissue in the Mammogram via Jointly Selecting and Weighting Visual Words.** In *Proceedings of the Sixth International Conference on Image and Graphics (ICIG 2011).* Edited by Nenghai Yu, Yujin Zhang, Nat. Natural Sci. Found. China 2011:622–7. [2011 Sixth International Conference on Image and Graphics (ICIG 2011), 12-15 Aug. 2011, Hefei, Anhui, China].
27. Wang J, Li Y, Marchiori E, Wang C: **Iterated large-margin discriminant analysis for feature dimensionality reduction in medical image retrieval.** *International Journal of Biomedical Engineering and Technology* 2011, **7**(2):116 – 134, [http://dx.doi.org/10.1504/IJBET.2011.043174]. [Class conditional neighbouring graph; Dimensionality reduction; DR; Expectation-maximisation; Iterated large-margin discriminant analysis; Medical image retrieval;].
28. Wang J, Almasri I: **Modeling multiple visual words assignment for bag-of-features based medical image retrieval.** In *Proceedings of the IASTED International Conference on Computer Graphics and Imaging, CGIM 2012*, Crete, Greece 2012:217 – 224, [http://dx.doi.org/10.2316/P.2012.779-015].
29. Wang J, Li Y, Liang P, Zhang G, Ao X: **An Effective Multi-Biometrics Solution for Embedded Device.** In *2009 IEEE INTERNATIONAL CONFERENCE ON SYSTEMS, MAN AND CYBERNETICS (SMC 2009), VOLS 1-9*, IEEE International Conference on Systems Man and Cybernetics Conference Proceedings, IEEE 2009:917–922. [IEEE International Conference on Systems, Man and Cybernetics, San Antonio, TX, OCT 11-14, 2009].
30. Wang J, Li Y, Ao X, Wang C, Zhou J: **MULTI-MODAL BIOMETRIC AUTHENTICATION FUSING IRIS AND PALMPRINT BASED ON GMM.** In *2009 IEEE/SP 15TH WORKSHOP ON STATISTICAL SIGNAL PROCESSING, VOLS 1 AND 2*, IEEE; SP 2009:349–352. [15th IEEE/SP Workshop on Statistical Signal Processing, Cardiff, WALES, AUG 31-SEP 03, 2009].

31. Jingyan Wang, Yongping Li, Chao Wang: **How to handle missing data in robust multi-biometrics verification.** *International Journal of Biometrics* 2011, **3**:265–83.
32. Zhai X, Zhao Y, Wang J, Li Y, Wang Q, Xie H: **Adaptive SVM Fusion for Robust Multi-Biometrics Verification with Missing Data.** In *2011 INTERNATIONAL CONFERENCE ON ENERGY AND ENVIRONMENTAL SCIENCE-ICEES 2011, Volume 11 of Energy Procedia*. Edited by Zhou, X, Singapore Inst Electron 2011:1006–1012. [International Conference on Energy and Environmental Science (ICEES), Singapore, SINGAPORE, OCT, 2011].
33. Liu J, Hou Y, Wang J, Li Y, Wang Q, Man J, Xie H, He J: **Fusing Iris and Palmprint at Image Level for Multi-Biometrics Verification.** In *FOURTH INTERNATIONAL CONFERENCE ON MACHINE VISION (ICMV 2011): COMPUTER VISION AND IMAGE ANALYSIS: PATTERN RECOGNITION AND BASIC TECHNOLOGIES, Volume 8350 of Proceedings of SPIE*. Edited by Zeng, Z and Li, Y, Singapore Inst Elect; Int Assoc Comp Sci & Informat Technol (IACSIT) 2012. [4th International Conference on Machine Vision (ICMV) - Computer Vision and Image Analysis - Pattern Recognition and Basic Technologies, Singapore, SINGAPORE, DEC 09-10, 2011].
34. Wang J, Li Y, Zhang Y, Huang Y: **Implementing Multimodal Biometric Solutions in Embedded Systems.** *Biometrics - Unique and Diverse Applications in Nature* 2011.
35. Wang J, Li Y, Bai X, Zhang Y, Wang C, Tang N: **Learning context-sensitive similarity by shortest path propagation.** *PATTERN RECOGNITION* 2011, **44**(10-11, SI):2367–2374.
36. Zhonghua Liu, Jingyan Wang, Yongping Li, Ying Zhang, Chao Wang: **Quantized image patches co-occurrence matrix: a new statistical approach for texture classification using image patch exemplars.** In *Proceedings of the SPIE - The International Society for Optical Engineering, Volume 8009* 2011:80092P (5 pp.). [Third International Conference on Digital Image Processing (ICDIP 2011), 15-17 April 2011, Chengdu, China].
37. Wang J, Jabbar MA: **Multiple Kernel Learning for adaptive graph regularized nonnegative matrix factorization.** In *Proceedings of the IASTED International Conference on Signal Processing, Pattern Recognition and Applications, SPPRA 2012*, Crete, Greece 2012:115 – 122, [<http://dx.doi.org/10.2316/P.2012.778-049>].
38. Liu Z, Wang J, Man J, Li Y, You X, Wang C: **Self-adaptive Local Fisher Discriminant Analysis for semi-supervised image recognition.** *International Journal of Biometrics* 2012.